


Engineering Data

Model	Stroke (mm)	Max. Energy / Cycle (Nm)	Max. Energy / Hour (Nm / h)	Effective Weight (Kg)			Recoil Force (N)		Weight (g)
				S	M	H	Ext.	Comp.	
IASS08 - 06(B)	6	5	8,000	0.8 - 2.8	2.5 - 12.6	10 - 111	2.2	5.8	10
IASS10 - 08(B)	8	11	14,500	1.8 - 6.1	5.5 - 27	22 - 244	2.5	6.9	15.5

Dimensions

(unit : mm)

Model	Stroke	A	B	C	D	E	F	G	M	Dr
IASS08 - 06(B)	6	54	7.5	35	7	47	Ø6.8	Ø6.8	M8 X 1.0	Ø2
IASS10 - 08(B)	8	64.5	7.5	42	7	57.5	Ø7	Ø8	M10 X 1.0	Ø3

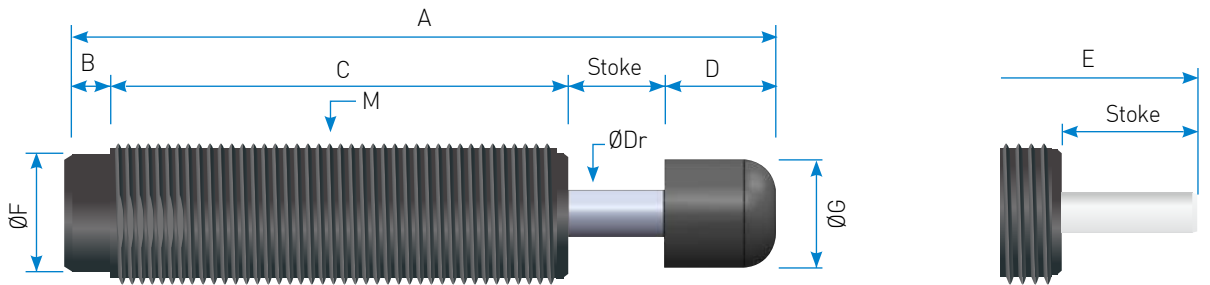


MC Nylon head

Accessories


(unit : mm)

Model	Stop Collar				Clamp Mount						Lock Nut		
	A1	A2	A3	A4	C1	C2	C3	C4	C5	C6	D1	D2	D3
IASS08 - 06(B)	20	8	Ø11.5	M8 X 1.0	16	14	25	10	M8 X 1.0	M4 X 16L	12	M8 X 1.0	3
IASS10 - 08(B)	20	8	Ø12.8	M10 X 1.0	16	14	25	10	M10 X 1.0	M4 X 16L	13	M10 X 1.0	4

Stop Collar



Clamp Mount

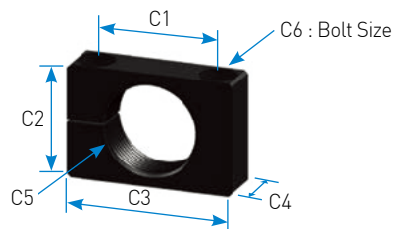

Lock Nut

